Working Papers on The Nature of Evidence:
How Well Do 'Facts' Travel?
No. 18/07

Accurate Measurement and Design Standards: Consistency of Design and the Travel of 'Facts' Between Heterogeneous Groups

Aashish Velkar

don't belong to the 'club'.[2] Network effects alone do not ensure standardization. Firm strategies, buyer preferences, technological change (which could be exogenous to the firm), and public policy contribute towards convergence on uniform standards.[3] Standardization is a double-edged sword and firms tend to use it as a strategic choice variable. In industries where entry barriers are weak and network effects are strong, smaller firms prefer to establish compatible standards as this helps to expand user base and make price competition less aggressive. On the other hand, dominant firms tend to resist uniformity and strive to make their standards non-compatible to protect market share.[4] The exception to this observation would be an external 'threat' either as a result of government regulation imposing standards or dominant buyers insisting that the manufacturers use uniform standards which they specify. If a few dominant producers perceive these to be 'wrong' standards, they would cooperate to pre-empt this move and establish a uniform standard of *their* preference.

This paper presents a historical case from the nineteenth century of such a defensive strategy where dominant firms cooperated to set a uniform standard to prevent 'lock-in' on what they perceived to be an inappropriate standard. I argue in the case of the British wire industry that a few dominant manufacturers, facing intense international competition, cooperated to prevent the standardization of the 'wrong' wire sizes proposed by the Board of Trade (BoT). The resultant standards were a compromise negotiated between the dominant producers of metal wires,

---

[2] Swann, Temple and Shurmer, 'Standards and trade'.; Antonelli, 'Standards as institutions'.; Teece and Sherry, 'Standards setting and antitrust'.; Metcalfe and Miles, 'Standards, selection, variety'.; Axelrod, Mitchell, Thomas, Bennett and Bruderer, 'Coalition formation'.;

[3] Koski and Kretschmer, 'Competing in network industries'.; David and Greenstien, 'Compatibility standards'.

[4] Katz and Shapiro, 'Network Externalities, Competition and Compatibility'.; Besen and Farrell, 'Strategies in standardization'.; Cusumano, Mylonadis and Rosenbloom, 'VHS and Beta'.; Koski and Kretschmer, 'Standards and competition'. 144.97455 100.16037 Tm (c0 0 10.98 37

BoT, and the various chambers of commerce – albeit those which were largely based on the preferences of the dominant producers. Before discussing the specific case, the paper presents the nature and significance of standardization in the 19th century, and sets the context in which this case is analyzed.

Standardization in the Nineteenth Century

Although standards can be non-rival public goods, they can also be considered as private goods as they can be made excludable.[5] This duality gives rise to the compatibility as well as the competitiveness nature of standards. Producers use standardization as a competitive strategy in deciding whether to make their standards compatible or not. Consider the variety of measurement st

The techniques of interchangeable manufacturing that originated in the state armouries of eighteenth century France were adopted by engineering firms almost a century later in the form that would become the American system of manufacturing.[9] Technological convergence helped in standardizing processes such as cutting metal into precise shapes; the result being that machine types and machine tools became standardized.[10] Some historians challenge the notion that machine precision replaced artisan skills, arguing instead that newer mechanical methods depended both upon the traditional skills as well as newer skills, making this the limiting condition determining the 'progress of new technology'; and consequently the nature and extent of standardization.[11] The objectivity and the form of nineteenth century standards is as much an outcome of social construction as it is of technological convergence.[12] Standardization also implied de-skilling of labour when, for instance, limit gauges began to be used for measuring the grinding of machine parts. Gauging thus became 'a mechanical affair [not requiring] the same skill or the same knowledge on the part of the workman'.[13] Further, British engineering standards must also be placed in the context of increasing competition from other industrializing nations such as Germany and the United States. The degree to which British industry adopted manufacturing of standardized parts was a result of the competitive response by British producers to the rise of German and American engineering industries.[14]

Standardization was an integral part of the overall Victorian landscape. Apart from standardized engineering products (machine tools,

---

[9] Alder, 'Innovation and amnesia'.; Hounshell, *American syste*

screws, gauges, etc.), this included scientific and technological standards (the 'ohm' and the voltmeter),[15] measurement standards (e.g. accounting, weights and measures),[16] standards used in trade (e.g. commercial contracts, commodity grades),[17] etc. The issue of standardization was important enough for the Board of Trade in the UK to have a Standards Department by the 1860s, and by the early 1900s the British Engineering Standards Association was formed. Standardization in this period must also be placed firmly in the context of the Victorian markets, which were far from being the 'neutral arena for competitive exchange'.[18] Many Victorians considered the 'un-trammeled market forces' to be dangerous unless linked to a source of 'unquestioned authority' which adjudicated when 'morality clashed with market principles'.[19] This view of the market has important implications for any standardization story, as setting standards involves not only solving the technical issues but also overcoming issues of coordination between the various groups involved. The need to solve coordination issues arises due to path-dependency of standards. Industries can get locked into standards at an early stage and so fail to switch to better or more efficient standards.[20]

I situate the case of the wire industry and the emergence of standard wire sizes in the context of the foregoing issues. British wire producers did not manufacture according to standardized wire sizes and 'consequently purchasers [were] so completely at the mercy of the manufacturers that they [were] driven to all kinds of expedients in order to

[15] Hunt, 'Electrical standards'; Gooday, 'The morals of energy metering'.
[16] Brackenborough, Mclean and Oldroyd, 'DCF in Tyneside coal industry'; Fleischman and Macve, 'Management accounting in coal mining'.; Connor, *English Measures*.
[17] Forrester, 'Commodity Exchanges'.; Ferguson, 'Commercial disputes system'.; Chattaway, 'Arbitration'.
[18] Johnson, 'Market Disciplines'.
[19] Searle, *Morality and market*, 256.; cf. Gambles, *Protection and politics*.
[20] David, 'QWERTY'.; Cowan, 'Technological lock-in'.; Farrell and Saloner, 'Standardization, compatibility, and innovation'.; Arthur, 'Lock-in by historical events'.

protect themselves'.[21] In the 1870s, telegraph engineers complained that wire sizes varied with every manufacturer.[22] Each group of buyers and sellers of wire wanted their own standard to be adopted as the industry standard. Standardizing the size of wire depended upon standardizing the wire gauge used in its manufacture. This was easier said than done, as different gauges had emerged by the early nineteenth century, varying by geography (Birmingham, Lancashire, etc.

their own preferred industry standard. The following section briefly reviews the state of the industry following the standardization of the wire gauge in 1883 and makes some observations regarding the extent of its adoption. The final section puts these events into perspective and draws general conclusions regarding competition, coordination and standardization.

Wire Manufacturing in England

Standardization of wire sizes is best understood in the context of the economic geography of wire manufacturing in the late nineteenth century. The origins of metal wire manufacturing in England can be traced back to the fourteenth century with wire drawing technology introduced from Germany. By the early nineteenth century, Lancashire had become an important centre for wire making activity, encouraged by engineering workshops located in this region. Peter Stubs, the Warrington tool maker, became involved in the wire trade initially as a large buyer of pinion wire, but eventually the firm he founded became one of the most important wire producers in the country.[23]

(Halifax/Yorkshire), and Ramsden Camm & Co. (West Yorkshire) among others.[25] However, a majority of the firms involved in wire drawing were numerous small workshops located in and around these major centres. In Birmingham alone there were about 70 wire manufacturers and about 40 wire weavers[26] in 1875, which had increased from 5 in 1800 and 35 in 1866.[27]

In terms of size and output, some of the larger wire makers had multiple manufacturing locations, specialized in many different kinds of wire, employed large numbers of wire drawers and manufactured other products based upon wire. Richard Johnson & Nephew had works at Manchester and Ambergate, employed about 1000 workers and specialized in telegraph and fencing wire, wire rope, tinned mattress wire, fencing wire etc. Rylands produced about 700 to 800 tons of wire and wire products per week, employed about 700 workers, and specialized in telegraph and fencing wire, galvanized, tinned and coppered wire, and roping and netting wire. Similarly, Whitecross Company Ltd, employed between 800 to 1000 workers, made puddled bars, iron and steel billets, wire rods, plain and coated telegraph and telephone wires, plain and galvanized fencing wire, rope wire, tinned and copper wire, and was perhaps the largest and most integrated, diversified enterprise. The annual capacity of this firm was thought to be about 5000 tons of ropes and 5000 miles of netting and 1500 tons of nails.[28] On the other end of the scale were the smaller manufacturers of wire with far less capital and machinery and employing fewer people. According to one estimate, wire drawers making jewellery wires in Birmingham employed less than 150

[25] Stones, *Wire Industry*, 1; Griffiths, *Iron manufacturers*., lists 31 'principal' firms, included those listed here.
[26] White, *Birmingham trades directory*., categorized as wire drawers, wire manufacturers, iron and steel wire manufacturers, wire rope makers or wire weavers
[27] Aitken, 'Brass manufactures', 359, those manufacturing of rolled brass and wire
[28] Smith, *Wire, its manufacture and uses*, 93-98.

people.[29] The industry was thus composed of both large and small firms. Most firms, irrespective of size produced a variety of wire products.[30] Nevertheless, there was geographical specialization in that Yorkshire wire makers were drawing mainly finer, smaller wire type, whereas the Lancashire and Birmingham makers were drawing both thicker and finer wire.[31]

In terms of its applications, wire was virtually ubiquitous and one contemporary writer listed no less than 25 distinct uses, including electrical conductors (e.g. cable and telegraph wires) and scientific instruments; carding machines for textile purposes; manufacture of ropes employed for marine, mining, agricultural, and engineering uses; fabrication of sieves, screens gauze, and netting; spectacle frames and watch springs; manufacture of pins and needles, nails, rivets, fish hooks and umbrella ribs; musical instruments; gates, railings, hurdles and fencing. The list goes on.[32] About 80-90 percent of persons employed in the manufacture of pins, needles and nails were located in the West Midlands, along with about two thirds of those employed in the manufacture of rivets, bolts and staples – indicating the concentration of industries using wire and wire products.[33] In Birmingham, there were about thirty-five pin manufacturers, seventy spectacle makers, forty screw manufacturers, and twenty musical instrument makers (of which eight were manufacturers of pianofortes).[34] Lancashire watch makers used to purchase pinion wire from wire makers of Warrington and Manchester.[35] Wire-netting and wire-rope were also manufactured around the Midlands and in Birmingham and several pianoforte manufacturers were located in

[29] Carnevali, 'Crooks, thieves and receivers', 539.
[30] Blake-Coleman, *Copper wire*, 209.
[31] *Ironmonger*, Feb. 26, 1881, p. 261
[32] Smith, *Wire, its manufacture and uses*, 5.
[33] Census of England and Wales (1871, 1881 and 1891), London: HMSO
[34] White, *Birmingham trades directory*.
[35] Dane, *Peter Stubs*.; Landes, 'Watchmaking'.

Leeds and other locations in Yorkshire. Finer sizes of Yorkshire iron wire were also used for wool and cotton cards, and sieves. Warrington manufacturers were known to obtain fine wire from Yorkshire.[36] Fine wire made from gold, silver, nickel, copper and brass was used by jewellers and brass and metal works in and around Birmingham.[37]

Apart from these small and medium sized buyers of wire products, the large wire buyers included the telegraph companies and consortiums that required wire manufactured to fairly high and exacting specifications. Thomas Bolton & Co., Richard Johnson & Nephew and Webster & Horsfall had supplied large amounts of copper wire to the Atlantic Cable Company. One of the initial orders required 119.5 tons of copper to be drawn into 20,500 miles of wire, which had to be laid into a strand 2500 miles long.[38] Other large users were engineering companies involved in the construction of bridges and other civil projects. Richard Johnson & Nephew had tendered for an order of 3,400 tons of wire to form the main cables of the Brooklyn Bridge in the late 1860s.[39] Makers of fencing wire were other large users of wire products, while wire ropes were also used in mining operations.[40]

Unsurprisingly, Yorkshire, Lancashire and West Midland together employed about three-quarters of the wire drawers in England (table 1). The number of persons engaged in wire drawing or wire making increased between 1871 and 1891 indicating growth in wire making activity in these locations. The number of wire workers in Birmingham had increased from 90 to 600 between 1840 and 1860.[41] Wire drawing was a highly skilled activity and drawers were paid a premium wage compared to other occupations. For instance, in the mid-nineteenth century, a wire

[36] Hughes, *Wire Gauge*.
[37] *Ironmonger*, Feb. 26, 1881, p. 261
[38] Cited in Blake-Coleman, *Copper wire*, 157.
[39] Seth-Smith, *Richard Johnson & Nephew*, 75.
[40] Smith, *Wire, its manufacture and uses*.
[41] Lean, 'Wire drawing'.

drawers weekly wage could be between £3 and £5 in Sheffield, while an engineer could be paid between £1.20 and £1.30; wire workers wages were reportedly higher than those of skilled ironworkers in 1873.[42] Nevertheless, wire drawers normally had to pay for the wire to be cleaned before bringing it into the mills, a cost that must be factored in the 'premium' that wire drawers received.[43] Initially, trade union activity amongst the wire workers was limited as most early workers were self employed or worked in small scale shops. By the 1860s, union activity had increased and in 1868 the 'Thick Iron and Steel Wire Drawers Trade and Benefit Society' was formed. However, union membership decreased during the 1870s, and when the manufacturers began to implement wage reductions after 1878 the union was unable to present an effective resistance. As a result of this, manufacturers were able to negotiate wages down by as much as 25 percent.[44]

[42] Bullen, *Drawn together*, 7-8.; these varied considerably and the average earnings in Birmingham in 1866 were about 35s (£1.50) per week according to other sources, see Lean, 'Wire drawing'.; *Ironmonger*, Jan 11, 1879, p. 51-2
[43] Seth-Smith, *Richard Johnson & Nephew*, 81.
[44] Bullen, *Drawn together*, 14-15.

Table 1: Distribution of Wire Workers in England and Wales

	1871	1881	1891
Total: England & Wales (Nos.)	7		

Table 2: Estimates of Domestic Production of Wire in England and Wales

No. of Wire Drawers	Annual Output *Assuming 10 tons per worker*	*Assuming 13 tons per worker*	*Assuming 15 tons per worker*	UK Exports	Exports as

rolled bars, wire rods, drawn wire and nails. Westfalische Union, formed from an amalgamation of various older Westphalian firms in 1873, had an output of about 100,000 tons annually, employed about 3,000 workers, and made wire rods, drawn wire, wire strands and roping, nails, rivets, screws, besides large quantities of bar iron, axels, sheet metal, etc.[52]

Wire Drawing: Process, Sizes, and Gauges

Wire was produced from wire rods, which were approximately ¼ inch in diameter. To make wire, the rods were drawn or pulled through a series of perforated plates called drawplates. The perforations on the drawplate corresponded with sizes that ranged from Nos. 1 through to 20 for thicker wires, and from Nos. 20 through to 40 for finer wires, with increasing numbers signifying smaller diameters.[53] Many of these sizes were further divided into half and quarter sizes. The cost of making wire increased with each successive draw so that finer wire was costlier to manufacture as compared to wire of thicker sizes. A price list from 1884 offered size 1 to 6 for 2¼d per *cwt* (112 pounds), whereas a No. 12 wire was available for 4d. Similarly, a No. 15 wire in the same price list was available for 6¼d and a No. 20 for 1s 5½d.[54] The primary reason for this was that the wire-drawer's remuneration and other costs such as13.02 281.7lb804 Tm(of

No. 4 iron wire was required

> the drawer [took] annealed wire of No. 1, [gave] it a hole to No. 3 [and another] hole to No. 4. If he had reduced it from size 1 to 4 in one draw, [it] would be found irregular in thickness, ellipse here, fluted there, and flat further on, instead of being smooth and equal diameter throughout.[56]

There also existed a ‘relationship’ between a skilled wire-drawer and the wire sizes. For example, a skilled worker could take six feet of No. 22 soft *brass* wire, fasten one end to a post and pull at the other and thus obtain eight feet long No. 24 wire. Or he could take six feet of No. 22 soft *copper* wire and stretch it to seven feet No. 22¾ wire. The wire-drawer knew these metal properties and also that if he got to the ‘limits of cohesion’ he either ‘sucked’ or broke the wire; he used the wire sizes as his guide to do this.[57]

These examples highlight interesting issues concerning the method of manufacturing wire. There was a particular sequence of holes through which wire had to be drawn in order to make wire of a desired size as well as acceptable qow369.44Syj0.0005 T1 -0.0007 T75 13.02 0 0 13.02 314.414.72571.440

Throughout the nineteenth century, wire making technology kept pace with developments in wire applications. The move towards machine made wire meshes and netting in early nineteenth century led to the shift away from hand-drawn wire to wire drawn by mechanical means. Drawing longer pieces of wire using steam power was being carried out in the 1840.[58] George Bedson, of Richard Johnson & Nephew, introduced a continuous rod rolling mill in 1862, which effectively enabled longer coils of wire rods to be produced.[59] Around the same time, the Germans were also making improvements to rod rolling technology. In 1878 one observer reported that by making some changes to the manner in which rods were rolled in the rolling mill, the German wire makers could cut capital and labour costs.[60]

Nevertheless, the speed with which wire was drawn and the efficiency of drawing machines improved slowly and insignificantly throughout the nineteenth century. In fact the techniques for drawing wire in the late nineteenth century had changed little from those used in the late eighteenth century. In contrast, the output of rod rolling mills increased by a factor of almost fifty.[61] Increasing efficiency of wire drawing by combining several blocks of wire drawing machines was introduced in the late nineteenth century. In 1871, the Woods brothers from Manchester patented a continuous wire-drawing machine, which made it possible to pass wire through four drawplates at the same time.[62] Nevertheless, in 1880 it was reported that

> an ingenious machine has lately been introduced here for expediting the work, the wire passing through a succession of

[58] Thomas, *Wire rod production*, 15.
[59] Seth-Smith, *Richard Johnson & Nephew*.
[60] Thomas Morris, *'Four days in the Iron Wire Manufacturing District of Westphalia, Germany*', Warrington Literary and Philosophical Society, as cited in Thomas, *Wire rod production*, 23-4.
[61] Blake-Coleman, *Copper wire*, 83.; Laman, 'Wire-drawing', 268.
[62] Thomas, *Wire rod production*, 15.; Laman, 'Wire-drawing', 269.

> plates pierced by holes of diminishing gauges, [and] the wire is drawn down three sizes at once, at a great saving of time, labour and cost[63]

Continuous wire drawing technology was relatively new and not generally adopted within the British industry in the 1880s. The exception to this was the Ambergate works of Richard Johnson & Nephew, where in the early 1870s engineers from Washburn Co., an American wire manufacturer with whom the Johnsons had had long ties, were brought in

gauges were based upon the holes on the drawplates, which were themselves empirically derived. In turn, the gauge was used both as a verification tool, to ensure that the wire drawn was of the correct size, as

developed their own gauge based upon their own experience of wire drawing, on the metals being used, and the intended use of the wire. In other words, the indu

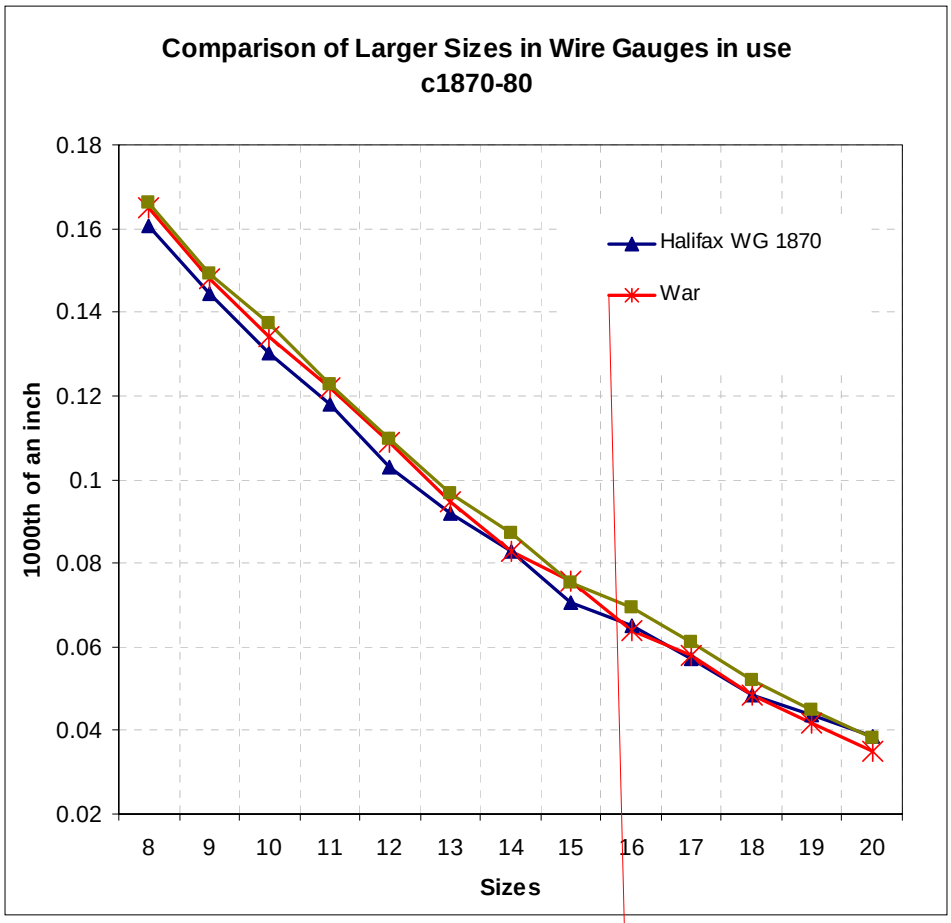
Comparison of Larger Sizes in Wire Gauges in use
c1870-80
0.18
0.16
0.14
0.12
0.1
0.08
0.06
0.04
0.02
1000th of an inch
8
9
10
11
12
13
14
15
16
17
18
19
20
Sizes
Halifax WG 1870
War

As the number of applications in which wire products were used increased, it led to the increase in the number of sizes included on the wire gauges. Eighteenth century wire gauges appeared to have used between twelve and sixteen sizes, whereas by 1842 the number of sizes had increased to at least twenty-six.[74] This indicates that the wire gauges in the mid-nineteenth century were a collection of various sizes, which got combined into one gauge.[75] The increasing complexity of sizes also emphasized the need for workmen to remember only the wire numbers rather than the measurements in inches; the gauge numbers functioned as a convenient mnemonic.

The most widely known and used of the several gauges was the Birmingham Wire Gauge (BWG), although no single gauge can be traced which could be termed as *the* BWG. It was most likely a loosely termed collection of gauges that originated and were used in and around Birmingham. The BWG was also used in other locations apart from Birmingham, such as Manchester and Sheffield. Internationally, the BWG was known in Germany and parts of the United States.[76] The Stubs Lancashire gauge was originally defined by Peter Stubs and was preferred in Warrington, Sheffield, Manchester and Canada. Apart from these, other gauges included the Rylands gauge, the Cocker Steel gauge, the South Staffordshire gauge, etc. The size and dimensions of wire defined by some of these gauges is compared in table 3 below. Such slot-wire gauges were not the only type used by wire makers, although they were very widely used in Britain, Germany and the US, more than any other kind. A micrometer gauge used by some manufacturers in the US was described in 1877. This movable type of gauge was reported to be very precise and in trials ‘gauge boys [could] very easily be taught to

[74] Dickinson and Rogers, ‘Origin of gauges’.; Hughes, *Wire Gauge*.
[75] Hughes, *Wire Gauge*.
[76] Clark, ‘Birmingham gauge, 1867’, 332.; *Ironmonger*, Feb 14, 1880, editorial note

read the thousandth of an inch'.[77] However, the micrometer gauge was

Table 3: Comparison of Sizes of Various Wire Gauges *(1000th of an inch)*

Sizes	Stubs Gauge[1]	BWG[1]	Rylands Gauge[1]	Cocker Steel Gauge[2]	South Stafford -shire Gauge[2]	Variation as compared to the Stubs gauge (%)			
						BWG	Rylands Gauge	Cocker Steel Gauge	South Stafford -shire Gauge
1	300	312.5	300		302.5	-4	-		-1
2	284	281	274		275.5	1	4		3
3	259	265	250		256.5	-2	3		1
4	238	234	229	246	236	2	4	-3	1
5	220	218	209	226	217	1	5	-3	1
6	203	203	191	198	207.5	-	6	2	-2
7	180	187	174	183	184.5	-4	3	-2	-3
8	165	171	159	175	167.5	-4	4	-6	-2
9	148	156.25	146	160	153	-6	1	32	-3
10	134	140	133	136	134	-4	1	-1	-
11	120	125	117	128	116.5	-4	2	-7	3
12	109	109	100	107	106.5	-	8	2	2
13	95	93	90	100	96.5	2	5	-5	-2
14	83	78.125	79	92	89	6	5	-11	-7
15	72	70	69	79	73	3	4	-10	-1
16	65	62	62	70	60.5	5	5	-8	7
17	58	54	53	63	54	7	9	-9	7
18	49	46	47	57	49.5	6	4	-16	-

The foregoing discussion about wire sizes, numbers and gauges is significant in that we can identify various sources of transaction costs arising as a result of the different gauges in use. It is shown above how different wire numbers on two different gauges could refer to the same diameter of wire (in terms of length units). Or, to put it differently, the same wire number as measured by two different gauges could refer to different diameters of wire. Latimer Clark claimed that he was personally involved in a contract where the use of one gauge instead of another would have made a difference of £8,000 to the contract value. The solution w

gauge did not match the manufacturers gauge and vice-versa, etc., faced transaction costs arising from non-standardized wire sizes. On one hand, there were distinct advantages in making standard sizes uniform. Equally, there were advantages in maintaining ambiguity between wire sizes and gauge numbers. Transaction costs theoretically could be reduced by specifying the exact dimension of wire required (in length units) for each contract. The alternative was standardizing the gauge numbe

its size'.[90] Between 1867 and 1869, Latimer Clark presented two papers to the British Association wherein he stressed the 'necessity for having a recognized standard gauge' and proposed a scale, based on decimal divisions of the inch, where the size of the wire diameters increased by a constant rate of about 11 percent from the smallest size, or the weight of the wire by about 25 percent.[91] He acknowledged, however, that the new standard gauge should closely resemble the existing wire-gauges and retain the numbering system in use.

These proposals involved replacing existing methods to yield the desired wire sizes, either in terms of using decimal measurements or altering the relationship between the numbers and diameters that were established through long practice and experience. For instance, Whitworth's proposal involved completely altering the existing system of gauge numbers by reversing their order. Clark's proposed sizes involved a uniform decrement in sizes, meaning that some of his thicker sizes were larger than those actually in use. We lack any clear evidence regarithat w.38e aroposaTj0.00045Tc -0.0045 Tw 13.02 0 0 13.02 229.5426 74863.6065

cable specified the core to be made of seven No. 22 BWG copper wire with a total diameter equal to No. 14 BWG weighing 107 pounds per nautical mile.[92] Other buyers, such as pin manufacturers, demanded greater consistency in wire diameters. The introduction of automatic pin-making machines in the middle of the nineteenth century

was increasingly being purchased either by weight or with diameter specified in thousandths of an inch, this same system could be extended to the purchase of iron wire.[98] Nothing further seems to have occurred on this issue until May 1878 when the Society of Telegraph Engineers (STE) appointed a committee to further consider the issue of the wire gauge. Carl Siemens, brother of Werner and William Siemens and who was involved in the first major transatlantic submarine cable expedition aboard the 'Faraday', was a prime mover in getting the STE committee appointed in May 1878.[99] It consisted mainly of engineers (Latimer Clark, H Mallock, W H Preece, C V Walker, etc.), but also had J Thewlis Johnson of Richard Johnson and Nephew on the committee. The committee proposed a British Standard Gauge (BSG) which was basically Latimer Clark's geometric gauge as proposed in 1867. Although the BSG was to conform closely to the existing gauges, the report acknowledged that due to the principle of its construction (geometrically decreasing sizes) it would differ from the existing gauges, sometimes as much as whole sizes. However, it felt that 'the workmen and dealers would gradually become acquainted with it, and would soon begin to prefer it on account of its precision and uniformity, and its authority as a gauge of last appeal.'[100]

In October of the same year, the Birmingham Chamber of Commerce (BCC) canvassed the opinions of the principal dealers in metals and wire, and jewellers to seek their opinion as to the desirability of a uniform gauge. After corresponding with the other chambers of commerce, the BCC council decided to write to Joseph Whitworth asking

for assistance in developing a standard wire gauge.

Nevertheless, in March 1882, the ACC adopted Harding's proposal as the basis for their standard wire gauge.[106]

In March 1882, the ACC sent a memorial to the Board of Trade (BoT) presenting a case for the adoption of a uniform standard based on the Harding gauge. The memorial strongly urged the Board to consider their proposal 'for the purpose of its being legalized [as] the British Standard Wire Gauge'.[107] Immediately thereafter, in April 1882, the BoT circulated this proposed wire gauge to the rest of the industry, with some modifications, asking for their reactions and opinions on the proposal.[108] The industry response to this was fairly mixed. The proposal was approved by the large users of wire products, especially cable wire users such as the General Post Office and the telegraph companies. Several chambers of commerce also approved the BoT proposal, including the London, Birmingham, Leeds and Wolverhampton chambers. Also, many Birmingham engineering and metal working firms approved the proposal.[109]

However, the large wire makers, who were opposed to the ACC proposal from the beginning, objected to the BoT proposal forming the only legal and uniform gauge. In May 1882, the Iron and Steel Wire Manufacturers Association (ISWMA) was formed 'to decide upon the course to be taken [in] the matter of a standard wire gauge'.[110] The ISWMA wrote to the President of the Board of Trade stating that the sizes proposed were arbitrary, 'drawn without regard to the method of production', and were different from the sizes 'most generally known to

[106] Association of Chambers of Commerce, Executive Council Minutes: Vol 3, Council Papers, Guildhall Library, London, Ms 14476/3., entry dated Mar. 1, 1882; TNA, BT 101/114
[107] TNA, BT 101/114, Letter from the ACC dated Mar 15, 1882
[108] TNA, BT 101/119, Circular from BoT dated Apr 15, 1882
[109] TNA, BT 101/115; BT 101/116; BT 101/119
[110] Stones, *Wire Industry*, 1, 12.

consumers'.[111] The association came up with its proposed list of sizes – the Lancashire wire makers proposing the sizes for Nos. up to 20 and the Yorkshire manufacturers proposing the finer sizes from Nos. 21 to 50.[112] Although the wire sizes between the ACC and ISWMA proposals appear to be virtually identical, the difference between the sizes seemed to be of material importance at least to the wire manufacturers (figure 2 and table 4).

Figure 2.

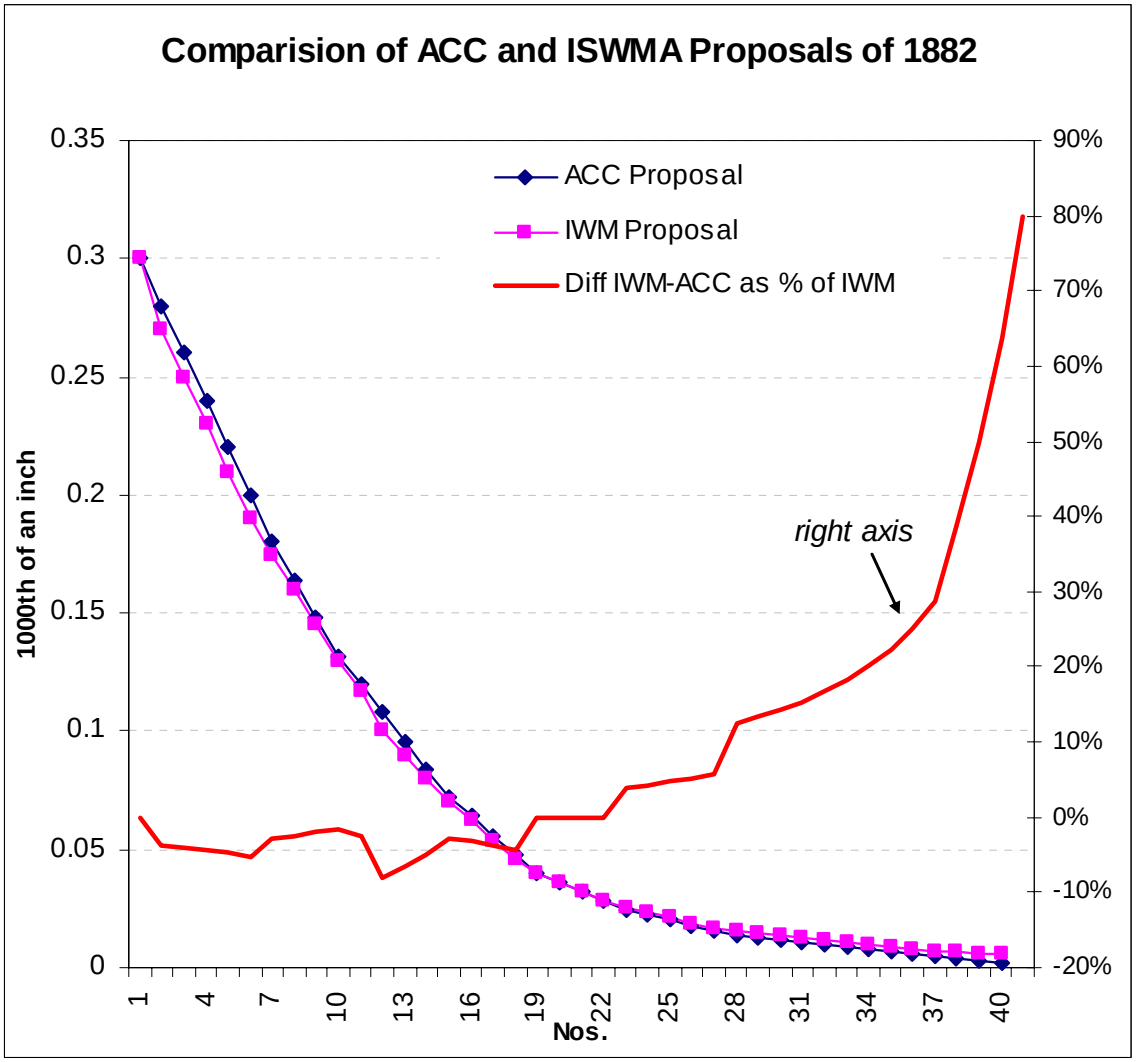

Source: The National Archives, BT 101/114 (ACC proposal); BT 101/116 (IWM proposal)

[111] TNA, BT 101/116, Letter from the ACC to the BoT dated July 7, 1882
[112] Stones, *Wire Industry*, 1.

The ISWMA did not represent the opinion of all wire makers. One irate correspondent, presumably a wire maker from Birmingham, wrote:

> because the major quantity is supposed to be drawn in Warrington all the others must submit to the Warrington wire gauge. Do we not see in the fact [that] iron wire can be drawn to the BWG and if it can in Birmingham, Yorkshire, Wales, etc., why not in Warrington?[113]

Even within the ISWMA there were differences in opinion regarding the response to the BoT's April 1882 proposal. The Yorkshire manufacturers, Frederick Smith & Company and Ramsden Camm & Company were in favour of the BoT proposal, but decided to go along with the majority view of opposing it and proposing an alternate standard gauge.[114]

Despite the fact that a majority of the replies received by the Board had approved the proposal, the BoT felt its proposal needed to be modified 'to meet the views of the Warrington district where most of the iron and steel wire [was] made'. Consequently, the BoT circulated a modified proposal in November 1882. The wire makers once again objected to the Board's proposal, and a further modified scale was proposed in February 1883.[115] The wire makers this time accepted the Board's February 1883 scale down to si

establish as legal the sizes which the trade say will be ruin to

No. 27 & 34 – remained. Table 4 shows the differenc6 remained. Tabl

Table 4: Comparison of the Standard Wire Gauge (SWG) to the

Competition, Coordination, and Negotiation

The initiative to establish a standard wire gauge in the 1870s came from the telegraph engineers. Subsequently, there were several different proposals for a uniform gauge that were under consideration. The STE had their own proposal by 1879, which the BoT was aware of, although the ‘subject [was] not referred to [them]’.[122] The ACC committee itself considered numerous proposals, including several made by Harding, Hughes and others, before deciding upon Harding’s scheme as its preferred wire gauge.[123] It is only after ACC’s decision to recommend the Harding gauge to the BoT as the legal standard and BoT’s subsequent actions to follow through this recommendation that the large wire makers cooperated to suggest their own standard gauge in 1882. Why did ISWMA oppose the ACC proposal? Why did the large manufacturers cooperate in the first place to form the ISWMA?

Towards the end of the 1870s, British wire industry was experiencing stagnation and stiff competition from foreign manufacturers, both in its domestic as well as overseas markets. German wire production nearly doubled between 1878 and 1882 and its exports of wire increased sevenfol

tons of ‘strand’ wire with a German firm ‘due to its cheapness’.[125] Some British wire makers imported German iron rod to turn it into wire or purchased German wire to make wire products such as screws, needles, and piano wire. Rylands was forced to purchase German rods when firms such as Pearson & Knowles found it difficult to compete with German

during the latter part of the nineteenth century. The resultant lower steel price in Germany vis-à-vis Britain meant that German firms found this policy of dumping steel and wire products overseas to be sustainable.[128] Transportation costs were comparatively lower in Germany (and Belgium and Holland). Railway frei

Technological improvements, such as continuous wire drawing, newer methods of annealing and treating wire, and so on, do not appear to have improved production efficiencies appreciably to the extent of allowing British firms to become competitive vis-à-vis the German firms. T

was reportedly common, creating an intensely competitive domestic market environment.[137]

Apart from cost rationalization, some firms followed the strategy of diversification. The firms of Edelston & Williams and Cornforth, makers of iron wire, began manufacturing steel wire for pianofortes – the traditional domain of firms such as Horsfall – in addition to making steel wire for ropes, cables, picture cords, etc.[138] Other firms such as Nettlefolds began amalgamating or merging with other, smaller firms producing screws in Smethwick (Birmingham), Stourport (West Midlands), Manchester, etc. with a view to eliminating competition. This increased concentration, reduced overcapacity and provided Nettlefolds with an assured market for its wire products as well as an assured supply of inputs for its screw-making business.[139] Apart from individual firm strategies, co-operative action by manufacturers was actually limited. The larger manufacturers - Rylands, Whitecross, Nettlefolds, Edleston Williams, Richard Johnson & Nephew, Hibell & Co., etc. – had formed the Steel Wire Manufacturers in 1878 to establish a common wage list. However, as soon as the wage cuts were made the association is known to have disbanded.[140] The wire industry did not form combinations or cartels to tide over this period of stagnant demand and high competition, such as those seen in the German industry, the US industry in 1894-95 or even those that were formed in related British industries, such as pin manufacturing.[141] There is no evidence of any other industry association during this period until the

[137] *Ironmonger*, Jan 22, 1881, p. 110
[138] *Ironmonger*, June 7, 1879, p. 763
[139] *Ironmonger*, Apr 9, 1881, p. 511; Nov 3, 1883, p. 650-51; May 24, 1884, p. 711
[140] Seth-Smith, *Richard Johnson & Nephew*, 83.; Bullen, *Drawn together*, 14.
[141] Jones, 'Price associations and competition'.; Warner, John Dewitt, *Steel & Wire*,

ISWMA was formed in 1882, primarily to deal with the issue of the standard wire gauge.

In the context of this competitive environment, we can now evaluate the failure of ACC and ISWMA to agree on a single industry standard. The main objection of ISWMA to the ACC and other proposals was that the difference in the sizes proposed by the various gauges implied that the numbers to which wire was normally drawn would have to be altered. For instance, switching from a Lancashire gauge to the ACC gauge involved changing the numbers in thirteen of the fourteen sizes between Nos. 6 and 18 of the existing gauge. It is this change in numbers rather than the differences in the length of the diameters *per se* which increased the cost of producing wire. Hughes argued that as 75 percent of the thick wire is drawn according to the Lancashire gauge, the result of switching to the ACC gauge would be 'ruination' for the wire trade and would mean 'more serious complications with their workpeople'.[142] This assessment is evident from the cost increases he estimated (for sizes up to No. 18) which were substantial, especially when compared to the price of wire for each size (see table 6). He further argued that iron wire finer than size 20 was not seriously affected by the ACC/Harding gauge as finer iron wire was mostly drawn in Yorkshire to the gauge, which was already in use by Yorkshire firms such as Harding & Sons: implying that there was little difference between the existing Yorkshire gauges and the ACC/Harding gauge. His anal

more than 9s per pound or £84 per ton, this was a substantial increase in production cost.[143]

Table 6: Impact of switching from Lancashire wire gauge to Harding's proposed wire gauge[1]

Lancashire Wire Gauge No.	Harding Gauge No.	Increase in cost of production *(shillings per ton)*	Reference Price *(shillings per ton)*[2]
6	*7*	10	4
7	*8*	5	4
8	*9*	10	5
9	*10*	15	5
10	*10*	-	5
11	*12*	10	6
12	*13*	10	7
13	*14*	10	8
14	*15*	15	8
15	*16*	15	10
16	*17*	20	13
17	*18*	25	17
18	*19*	25	18

[1] The table has been reproduced from estimates reported by Thomas Hughes in *Ironmonger*, Mar 25, 1882.
[2] The reference prices mentioned here are from a price list from 1884 which was reproduced in .

The dominant wire manufacturers fiercely objected to the ACC gauge becoming the legal industry standard. The memorial sent by the ISWMA to the BoT in July 1882 stated that switching to that gauge would give 'the foreign manufacturers an additional advantage over the English manufacturers' which they would be unable to either absorb or pass on to

[143] Price of copper wire from Blake-Coleman, *Copper wire*, 230-32; *Ironmonger*, Mar 25, 1882, letter by Thomas Hughes; see also Mar 5, 1881, p. 304-306 for a similar analysis by an anonymous correspondent

buyers.[144] The switching of standards also implied a renegotiation of wages with the wire workers. Sheffield manufacturers complained that the ACC gauge would involve ‘arranging new prices with the workmen and warehousemen’.[145] Thus, the switchover was likely to result in both a short as well as a longer term impact on the competitiveness of the British manufacturers. Consequently, the ISWMA proposed their own gauge which was different from the ACC gauge in that the sizes between 1 and 20 in the ISWMA proposal were smaller compared to the ACC proposal (see table 4). The large manufacturers argued that the ACC gauge would require them to draw the wire to a smaller number just to maintain the same diameter of wire. This would increase the number of draws and therefore the cost of wire. They argued that as the thicker sizes constituted the bulk of the iron wire exported from Britain, the result of legalizing the ACC standards

single industry standard of their preference rather than the ‘wrong’ sizes proposed by the ACC.

Wire Industry and Gauges After 1883

Modern wire sizes are expressed using standardized gauges, such as the American Wire Gauge or the Metric Wire Gauge. Products derived from wire, such as hypodermic needles, also use gauges to express sizes rather than measurements su

stable throughout this period, except for a short increase during 1880-1882 and after 1900. In contrast, exports of German wire after 1880 and that of US wire after 1898 overtook those from Britain. German exports until 1887 comprised primarily of drawn wire, whereas the export of rods comprised a major proportion of their exports after this period. US exports continue to be dominated by drawn wire and have a much smaller proportion of wire rods (not included in the chart). British exports, shown here, are primarily comprised of drawn wire. Thus, standardizing the wire sizes did not make the British manufacturers any more competitive in relation to German manufacturers and the origins of German competitiveness lay in other factors such as cheaper input costs and overall efficiency. A trade report from 1886 stated that ‘the superiority of the Germans, owing to their long hours of work and low wages, is such

Conclusion

This paper has shown how, when rival industry groups could not agree on a ‘one-size-fits-all’ standard, a compromise solution emerged after the state became involved as an arbitrator in the dispute. The solution, in the form of a *de jure* standard, was sought to replace the various *de facto* standards that had emerged over time. The interesting aspect of this case is that the *de jure* standard was not a mandatory one, but an authoritative standard: a standard of last resort, such as that sought by engineers like Holtzapffel and Clark. This has some broad implications with regards to standardization and measurements in industry.

Firstly, the dynamic between the rival industry organizations – the ACC and ISWMA –, and the state brings into focus competitive strategy and lock-in effects. It is worthwhile reflecting upon the possibility that multiple standards can lead to lock-out effects (locking out competition), just as uniform standards can lock-in industries into fewer products or technologies. This may be pertinent in industries with weak entry barriers and high network effects. Incumbent firms – both producer or buyer firms – could actually prefer multiple standards in this scenario. Shifts in buyer preferences could initiate a move towards uniformity and the potential for lock-in effects. If different groups within the industry disagree on the nature of standards this would lead to coordination failure. The manner in which this is resolved will depend upon issues such as the exact nature of lock-in effects, cost of coordination and switch-over, relative bargaining power of the gr

wire industry, a majority of the wire manufacturing after 1883 occurred with the use of the SWG; however, it is likely that other sizes were used for unusual or one-off contracts. The introduction of the SWG did not make the old gauges illegal. In fact, it may have been necessary for the industry to use non-SWG sizes to capture the market for specialized, non-standardized or customized wire products. The issue here is whether this arrangement was more efficient than having a uniform but mandatory standard. What were the efficiency gains (or losses) from voluntary standards versus mandatory standards? Should *de jure* standards be voluntary or mandatory? Are *ex-ante* (*de jure*) standards better than *ex-post* (*de facto*) standards? While these questions still remain open, the history of wire gauges indicates that authoritative but voluntary standards can encourage competition within the legal gauge, and yet retain the flexibility to use other standards for specialized or customized applications.

should fit. This notion of desirable sizes, of accurately producing the sizes that were wanted by both users and producers, was ultimately important in converging towards uniform standards.

References

Adams, C A. "Industrial Standardization." In *The Annals of the American Academy of Political & Social Science: Industries in Readjustment*. Philedelphia, 1919: 289-299.

Aitken, W C. "Brass and brass manufactures." In *The resources, products and industrial history of Birmingham and the Midland hardware district*, edited by Timmins, Samuel. London: Robert Hardwicke, 1866: 225-380.

Alder, Ken. "Innovation and amnesia: Engineering rationality and the fate of interchangeable parts manufacturing in France." *Technology and Culture* 38, no. 2 (1997): 273-311.

---. "Making things the same: Representation, tolerance and the end of the ancien régime in France." *Social Studies of Science* 28, no. 4 (1998): 499-545.

Allen, Robert C. "International Competition in Iron and Steel, 1850-1913." *The Journal of Economic History* 39, no. 4 (1979): 911-937.

Antonelli, Christiano. "Loc 453.38062ainesi4oion395lri506 -0en, W C. "Brass and3.02 i50

Blake-Coleman, B C. *Copper wire and electrical conductors - The shaping of a technology*. Reading: Harwood Academic Publishers, 1992.

Brackenborough, Susie, Tom Mclean and David Oldroyd. "The emergence of discounted cash flow analysis in the Tyneside coal industry c1700-1820." *British Accounting Review* 33 (2001): 137-155.

Bullen, Andrew. *Drawn together: One hundred and fifty years of wire workers' trade unionism*, 1992.

Carnevali, Francesca. "'Crooks, thieves and receivers': transaction costs in nineteenth-century industrial Birmingham." *Economic History Review* 57, no. 3 (2004): 533-550.

Chattaway, C. "Arbitration eo8Tj13.02 0 0 13.02 236Tj13.02 0 0 13.02 38 478-2.02 0 0 1

ammeter and voltmeter." In *The values of precision*, edited by Wise, M Norton. Princeton, NJ: Princeton University Press, 1995.

Gordon, Robert B. "Who turned the mechanical ideal into mechanical reality?" *Technology and Culture* 29, no. 4 (1988): 744-78.

Griffiths, Herbert W. *Iron and steel manufacturers of Great Britain*. London, 1883.

Hatcher, John. *The history of the British coal industry (Volume 1: Before-1700)*. Oxford: Clarendon Press, 1993.

Holtzapffel, Charles. *Turning and mechanical manipulation - Vol. 2*. London, 1847.

Hounshell, David A. *From the American system to mass production 1800-1932 : the development of manufacturing technology in the United States.* Baltimore; London: John Hopkins University Press, 1984.

Hughes, Thomas. *The English Wire Gauge*. London, 1879.

Hunt, Bruce J. "The ohm is where the art is: British telegraph engineers and development of electrical standards." *Osiris* 9 (1994): 48-63.

Janes, Herford. *Rylands of Warrington: 1805-1955*: Harley Publishing Co., 1956.

Johnson, Paul. "Market Disciplines." In *Liberty and Authority in Victorian*

Koski, Heli and Tobias Kretschmer. "Entry, standards and competition: Firm strategies and the diffu

Saul, S B. "The market and the development of the mechanical engineering industries in Britain, 1860-1914." *The Economic History Review* 20, no. 1 (1967): 111-130.

Searle, G R. *Morality and the market in Victorian Britain*. Oxford: Clarendon Press, 1998.

Seth-Smith, Michael. *Two hundred years of Richard Johnson & Nephew*. Manchester: Richard Johnson & Nephew Limited, 1973.

Sinclair, Bruce. "At the turn of the screw: William Sellers, the Franklin Institute, and a standard American thread." *Technology and Culture* 10, no. 1 (1969): 20-34.

Smith, J Bucknall. *Wire, its manufacture and uses*. London & New York: John Wiley and Sons, 1891.

Stones, Frank. *The British Ferrous Wire Industry*. Sheffield: J W Northend Limited, 1977.

Swann, Peter, Paul Temple and Mark Shurmer. "Standards and trade performance: the UK experience." *The Economic Journal* 106, no. 438 (1996).

Teece, David J and Edward F Sherry. "Standards setting and antitrust." *Minnesota Law Review* 87, no. 6 (2003).

Thomas, Leslie. *The development of wire rod production*. London, 1949.

Walker, C V. "On the unit of the Birmingham Wire Gauge."

LONDON SCHOOL OF ECONOMICS
DEPARTMENT OF ECONOMIC HISTORY

WORKING PAPERS IN: THE NATURE OF EVIDENCE: HOW WELL DO "FACTS" TRAVEL?

For further copies of this, and to see other titles in the department's group of working paper series, visit our website at:
http://www.lse.ac.uk/collections/economichistory/

2005

01/05: Transferring Technical Knowledge and innovating in Europe, c.1200-c.1800
Stephan R. Epstein

02/05: A Dreadful Heritage: Interpreting Epidemic Disease at Eyam, 1666-2000
Patrick Wallis

03/05: Experimental Farming and Ricardo's Political Arithmetic of Distribution
Mary S. Morgan

04/05: Moral Facts and Scientific Fiction: 19th Century Theological Reactions to Darwinism in Germany
Bernhard Kleeberg

05/05: Interdisciplinarity "In the Making": Modelling Infectious Diseases
Erika Mattila

06/05: Market Disciplines in Victorian Britain
Paul Johnson

2006

07/06: Wormy Logic: Model Organisms as Case-based Reasoning
Rachel A. Ankeny

08/06: How The Mind Worked: Some Obstacles And Developments In The Popularisation of Psychology
Jon Adams

09/06: Mapping Poverty in Agar Town: Economic Conditions Prior to the Development of St. Pancras Station in 1866
Steven P. Swenson

10/06: “A Thing Ridiculous”? Chemical Medicines and the Prolongation of Human Life in Seventeenth-Century England
David Boyd Haycock

11/06: Institutional Facts and Standardisation: The Case of Measurements in the London Coal Trade.
Aashish Velkar

12/06: Confronting the Stigma of Perfection: Genetic Demography, Diversity and the Quest for a Democratic Eugenics in the Post-war United States
Edmund Ramsden

13/06: Measuring Instruments in Economics and the Velocity of Money
Mary S. Morgan

14/06: The Roofs of Wren and Jones: A Seventeenth-Century Migration of Technical Knowledge from Italy to England
Simona Valeriani

15/06: Rodney Hilton, Marxism, and the Transition from Feudalism to Capitalism
Stephan R. Epstein

2007

16/07: Battle in the Planning Office: Biased Experts versus Normative Statisticians
Marcel Boumans

18/07: Accurate Measurements and Design Standards: Consistency of Design and the Travel of ‘Facts’ Between Heterogeneous Groups
Aashish Velkar